


HIGH PERFORMANCE. POLYCRYSTALLINE GLASS / GLASS MODULE.



NST60-6-260-280Wp-HPP-GG-10.

COMMITMENT TO QUALITY, PRODUCTIVITY & SUSTAINABILITY

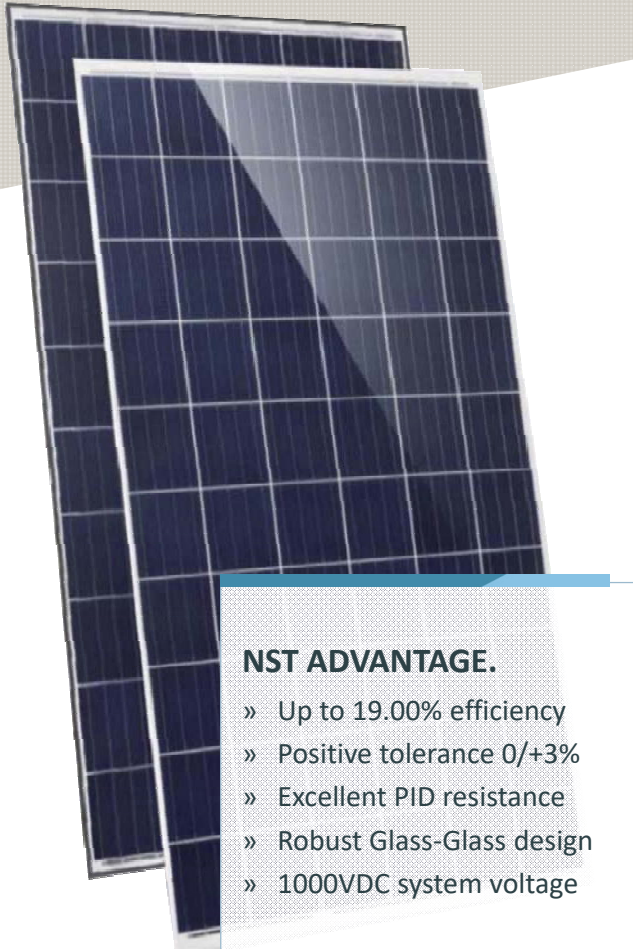

NST ADVANTAGE.

- » Up to 19.00% efficiency
- » Positive tolerance 0/+3%
- » Excellent PID resistance
- » Robust Glass-Glass design
- » 1000VDC system voltage



4/5 BUS BAR

4/5 BUS BAR SOLAR CELL

4/5 bus bar solar cell adopts new technology to improve the efficiency of modules and offers a better aesthetic appearance, making it perfect for ground and rooftop installation.



Less maintenance

LESS MAINTENANCE REQUIRED

Reduced soiling and snow coverage requires less maintenance and enhances fire safety.



Low Light

LOW-LIGHT PERFORMANCE

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



2400 Pa | 5400 Pa

SEVERE WEATHER RESILIENCE

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Resistant

DURABILITY AGAINST EXTREME ENVIRONMENTAL CONDITIONS

High salt mist and ammonia resistance certified by TUV NORD.



30 Years

30-YEARS LINEAR PERFORMANCE WARRANTY

15-years limited warranty for materials and workmanship and NST guarantee that each module shall deliver the following minimum output as shown in the datasheet for each module: **0.5% annual degradation over 30 years.**

About NOOR Solar Technology (NST)

NST is a leading provider and manufacturer of smart energy solutions with high performance and top quality standards. NST products are ideal for utility-scale PV power plants, as well as residential and commercial rooftop installations. NST and its trusted technology partners provide innovative renewable energy solutions meeting the highest standards in terms of reliability, safety and durability – guaranteed by one of the world-leading re-insurance groups. With NST's premium products, investors and owners enjoy long-term returns on investment and savings on their electricity bill.



PREMIUM PRODUCTS – PREMIUM RESULTS!

PRODUCT DATASHEET.

POLYCRYSTALLINE GLASS / GLASS MODULE.



NST60-6-260-280Wp-HPP-GG-10.

ENGINEERING DRAWINGS & TECHNICAL PARAMETERS

PHYSICAL PARAMETERS

Solar cell	Polycrystalline 156.75 X 156.75 mm
Cell configuration	60 cell (10 x 6)
Module dimension	1658 x 992 x 6.3 mm
Weight	23 kg
Front glass	2 mm, high transmission, low iron, tempered ARC glass
Back glass	2 mm, tempered glass
Interlayer	0.5 POE (white)
J-Box	IP67, 1000VDC, 3 bypass diodes
Cables	4.0 mm (12AWG), 1100 mm length (customer demand)
Connector	IP67 MC4 or its compatible

ELECTRICAL PARAMETERS (STC)

TYPE	NST60-6-260PDG	NST60-6-265PDG	NST60-6-270PDG	NST60-6-275PDG	NST60-6-280PDG
Rated maximum power at STC (Wp)	260	265	270	275	280
Open circuit voltage Voc (V)	38.1	38.6	38.8	39.2	39.6
Maximum power voltage Vmpp (V)	31.1	31.4	31.7	32.0	32.4
Short circuit current Isc (A)	8.98	9.03	9.09	9.14	9.20
Maximum power current Imp (A)	8.37	8.44	8.52	8.6	8.7
Module efficiency (%)	15.88	16.19	16.50	16.80	17.10

STC: Irradiance 1000W/m², cell temperature 25°C, air mass 1.5

ELECTRICAL PARAMETERS (NOCT)

TYPE	NST60-6-260PDG	NST60-6-265PDG	NST60-6-270PDG	NST60-6-275PDG	NST60-6-280PDG
Max power Pmax (W)	193	197	200	204	207
Open circuit voltage Voc (V)	35.2	35.3	35.4	35.4	35.6
Max power voltage Vmp (V)	28.7	29.0	29.4	29.8	30.2
Short circuit current Isc (A)	7.31	7.36	7.38	7.42	7.46
Max power current Imp (A)	6.71	6.78	6.80	6.85	7.00

NOCT: Under normal operating cell temperature, irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1m/s

TEMPERATURE COEFFICIENT AND PARAMETERS


Nominal operating cell temperature (NOCT)	45°C ± 2°C
Temperature coefficient of Pmax	-0.385%/°C
Temperature coefficient of Voc	-0.32%/°C
Temperature coefficient of Isc	0.055%/°C
Operating temperature	-45°C~+85°C
Maximum system voltage	1000VDC
Limiting reverse current	15A
Maximum series fuse rating	15A
Power tolerance (W)	0/+3%
Application class	Class A
Wind and snow front load	Up to 5,400 Pa
Wind back load	2,400 Pa

PACKAGING CONFIGURATION



	40ft	20ft
Number of modules per container	780	360
Number of modules per pallet	30	30
Number of pallets per container	26	12
Packing box dimension (L x W x H) in mm	1770 x 1140 x 1184	1770 x 1140 x 1183
Box gross weight (Kg)	753	753

DIMENSION OF PV MODULE UNIT

Dimension of PV Modules

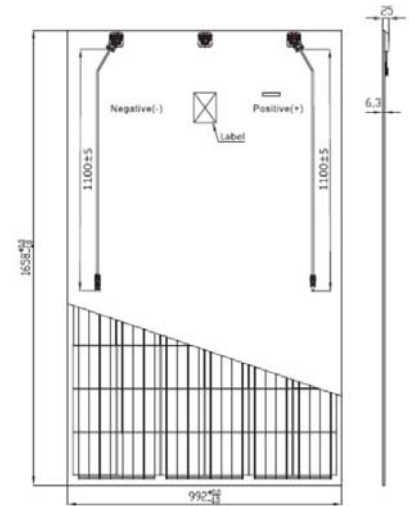

I-V CURVE

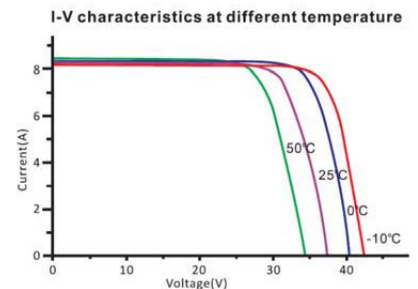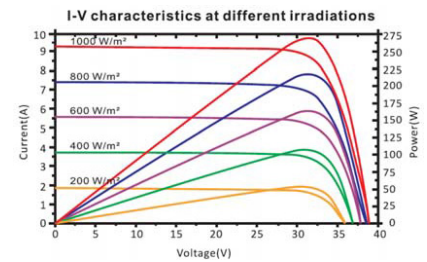

AUTHORIZED PARTNER OF NST