


# HIGH PERFORMANCE. POLYCRYSTALLINE GLASS / GLASS MODULE.



## NST72-6-320-340Wp-HPP-GG-15.

COMMITMENT TO QUALITY, PRODUCTIVITY & SUSTAINABILITY

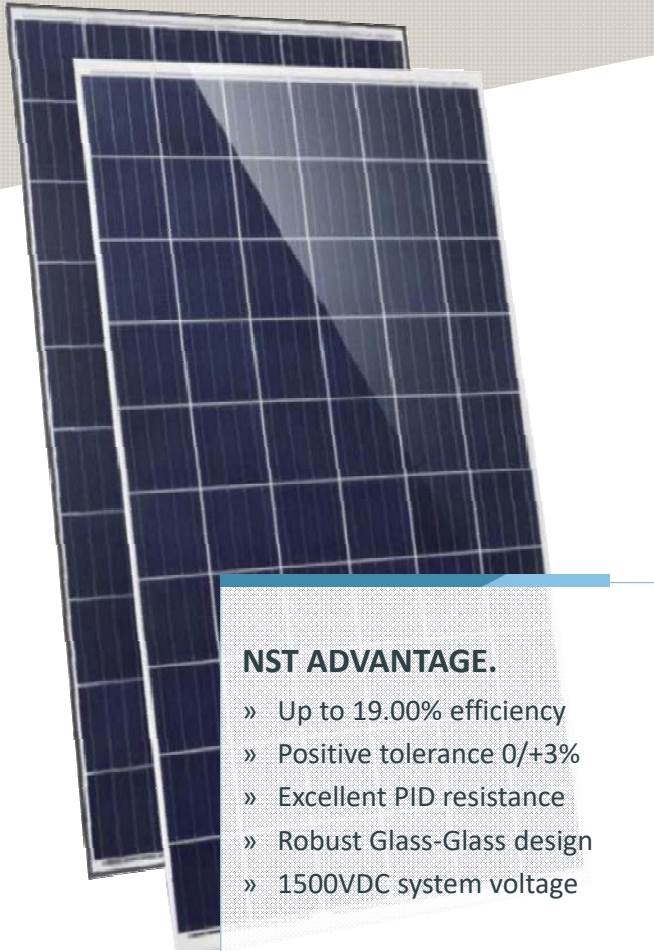

### NST ADVANTAGE.

- » Up to 19.00% efficiency
- » Positive tolerance 0/+3%
- » Excellent PID resistance
- » Robust Glass-Glass design
- » 1500VDC system voltage



4/5 BUS BAR

### 4/5 BUS BAR SOLAR CELL

4/5 bus bar solar cell adopts new technology to improve the efficiency of modules and offers a better aesthetic appearance, making it perfect for ground and rooftop installation.



Less maintenance

### LESS MAINTENANCE REQUIRED

Reduced soiling and snow coverage requires less maintenance and enhances fire safety.



Low Light

### LOW-LIGHT PERFORMANCE

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



2400 Pa | 5400 Pa

### SEVERE WEATHER RESILIENCE

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Resistant

### DURABILITY AGAINST EXTREME ENVIRONMENTAL CONDITIONS

High salt mist and ammonia resistance certified by TUV NORD.



30 Years

### 30-YEARS LINEAR PERFORMANCE WARRANTY

15-years limited warranty for materials and workmanship and NST guarantee that each module shall deliver the following minimum output as shown in the datasheet for each module: **0.5% annual degradation over 30 years.**

## About NOOR Solar Technology (NST)

NST is a leading provider and manufacturer of smart energy solutions with high performance and top quality standards. NST products are ideal for utility-scale PV power plants, as well as residential and commercial rooftop installations. NST and its trusted technology partners provide innovative renewable energy solutions meeting the highest standards in terms of reliability, safety and durability – guaranteed by one of the world-leading re-insurance groups. With NST's premium products, investors and owners enjoy long-term returns on investment and savings on their electricity bill.



## PREMIUM PRODUCTS – PREMIUM RESULTS!

# PRODUCT DATASHEET.

## MONOCRYSTALLINE GLASS / GLASS MODULE.



### NST72-6-320-340Wp-HPP-GG-15.

#### ENGINEERING DRAWINGS & TECHNICAL PARAMETERS

##### PHYSICAL PARAMETERS

Solar cell	Polycrystalline 156.75 X 156.75 mm
Cell configuration	72 cell (12 x 6)
Module dimension	1968 x 992 x 6 mm
Weight	28 kg
Front glass	2 mm, high transmission, low iron, tempered ARC glass
Back glass	2 mm, tempered glass
Interlayer	0.5 POE (white)
J-Box	IP67, 1500VDC, 3 bypass diodes
Cables	4.0 mm (12AWG), 1100 mm length (customer demand)
Connector	IP67 MC4 or its compatible

##### ELECTRICAL PARAMETERS (STC)

TYPE	NST72-6-320PDG	NST72-6-325PDG	NST72-6-330PDG	NST72-6-335PDG	NST72-6-340PDG
Rated maximum power at STC (Wp)	320	325	330	335	340
Open circuit voltage Voc (V)	46.4	46.7	46.9	47.07	47.29
Maximum power voltage Vmpp (V)	37.4	37.6	37.8	38.00	38.20
Short circuit current Isc (A)	9.05	9.10	9.14	9.36	9.43
Maximum power current Imp (A)	8.56	8.66	8.74	8.82	8.91
Module efficiency (%)	16.49	16.75	17.01	17.19	17.42

STC: Irradiance 1000W/m<sup>2</sup>, cell temperature 25°C, air mass 1.5

##### ELECTRICAL PARAMETERS (NOCT)

TYPE	NST72-6-320PDG	NST72-6-325PDG	NST72-6-330PDG	NST72-6-335PDG	NST72-6-340PDG
Max power (Pmax) [W]	237	241	245	249	253
Open circuit voltage (Voc) [V]	43.0	43.3	43.6	43.9	44.2
Max power voltage (Vmp) [V]	34.7	35.0	35.3	35.6	35.9
Short circuit current (Isc) [A]	7.25	7.40	7.45	7.5	7.55
Max power current (Imp) [A]	6.83	6.89	6.94	6.99	7.04

NOCT: Under normal operating cell temperature, irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20°C, wind speed 1m/s


##### TEMPERATURE COEFFICIENT AND PARAMETERS

Nominal operating cell temperature (NOCT)	45°C ± 2°C
Temperature coefficient of Pmax	-0.385%/°C
Temperature coefficient of Voc	-0.32%/°C
Temperature coefficient of Isc	0.055%/°C
Operating temperature	-45°C~+85°C
Maximum system voltage	1500VDC
Limiting reverse current	15A
Maximum series fuse rating	15A
Power tolerance (W)	0/+3%
Application class	Class A
Wind and snow front load	Up to 5,400 Pa
Wind back load	2,400 Pa



##### PACKAGING CONFIGURATION

	40ft	20ft
Number of modules per container	720	300
Number of modules per pallet	30	30
Number of pallets per container	24	10
Packing box dimension (L x W x H) in mm	1956 x 1100 x 1250	1956 x 1100 x 1250
Box gross weight (Kg)	680	680

##### DIMENSION OF PV MODULE UNIT

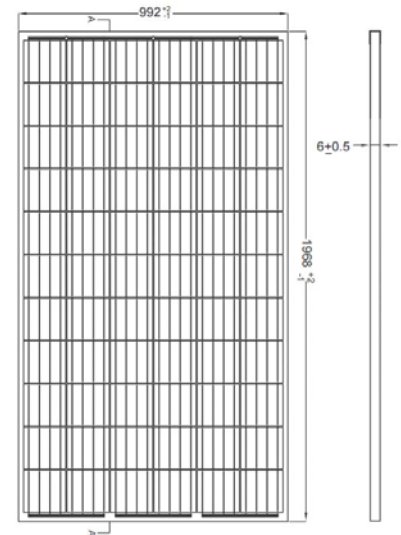

##### I-V CURVE

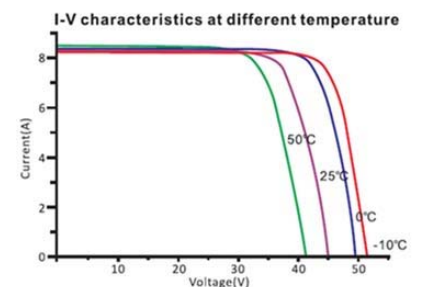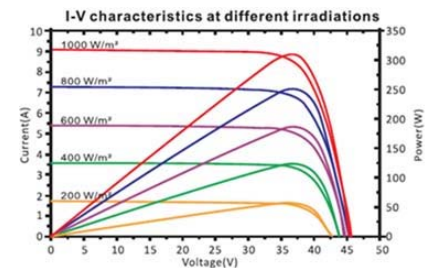

##### AUTHORIZED PARTNER OF NST

