

# HIGH PERFORMANCE. MONO CRYSTALLINE MODULE.



## NST72-6-340-360Wp-PERC-S-15.

HIGHEST PERFORMANCE THROUGH STATE-OF-THE-ART CELL TECHNOLOGY



### NST ADVANTAGE.

- » 18.57% max. efficiency
- » Positive tolerance 0/+3%
- » Excellent PID resistance
- » Robust design
- » 1500VDC system voltage



#### PERC SOLAR CELL

PERC panels have a higher energy density per square foot and perform well under high temperatures.



#### HIGH EFFICIENCY

High module conversion efficiency (up to 16.80%), through innovative manufacturing technology.




#### LOW-LIGHT PERFORMANCE

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



#### SEVERE WEATHER RESILIENCE

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



#### DURABILITY AGAINST EXTREME ENVIRONMENTAL CONDITIONS

High salt mist and ammonia resistance certified by TUV NORD.



#### 25-YEARS LINEAR PERFORMANCE WARRANTY

12-years limited warranty for materials and workmanship. NST guarantees that each module shall deliver the following minimum output as shown in the datasheet for.

## About NOOR Solar Technology (NST)

NST is a leading provider and manufacturer of smart energy solutions with high performance and top quality standards. NST products are ideal for utility-scale PV power plants, as well as residential and commercial rooftop installations. NST and its trusted technology partners provide innovative renewable energy solutions meeting the highest standards in terms of reliability, safety and durability – guaranteed by one of the world-leading re-insurance groups. With NST's premium products, investors and owners enjoy long-term returns on investment and savings on their electricity bill.



## PREMIUM PRODUCTS – PREMIUM RESULTS!

# HIGH PERFORMANCE. MONO CRYSTALLINE MODULE.



## NST72-6-340-360Wp-PERC-S-15.

### ENGINEERING DRAWINGS & TECHNICAL PARAMETERS

#### PHYSICAL PARAMETERS

Solar Cell	Mono-crystalline PERC 156.75 x 156.75 mm
Cell Configuration	72 cell (12 x 6)
Module Dimension	1956 x 992 x 34 mm
Weight	24 kg
Superstrate	3.2 mm, High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Backsheet
Frame	Silver Anodized Aluminum Alloy Type 6063T5, Silver Color
J-Box	IP67, 1500VDC, 3 Bypass Diodes
Cables	4.0 mm (12AWG), 1200 mm Length (Customer Demand)
Connector	IP67 MC4 Compatible

#### ELECTRICAL PARAMETERS (STC)

TYPE	NST72-6-340M	NST72-6-345M	NST72-6-350M	NST72-6-355M	NST72-6-360M
Rated Maximum Power at STC (Wp)	340	345	350	355	360
Open Circuit Voltage Voc (V)	47.1	47.3	47.5	47.8	48.0
Maximum Power Voltage Vmpp (V)	38.7	38.9	39.1	39.3	39.5
Short Circuit Current Isc (A)	9.24	9.31	9.38	9.45	9.51
Maximum Power Current Imp (A)	8.79	8.87	8.94	9.04	9.12
Module Efficiency (%)	17.52	17.78	18.01	18.31	18.57

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, air mass 1.5

#### ELECTRICAL PARAMETERS (NOCT)

TYPE	NST72-6-340M	NST72-6-345M	NST72-6-350M	NST72-6-355M	NST72-6-360M
Max Power Pmax (Wp)	254	258	262	266	270
Open Circuit Voltage Voc (V)	45.5	45.8	46.0	46.2	46.5
Max Power Voltage Vmpp (V)	36.8	37.0	37.2	37.5	37.7
Short Circuit Current Isc (A)	7.33	7.38	7.46	7.54	7.61
Max Power Current Imp (A)	6.83	6.89	6.94	7.09	7.48

NOCT: Under Normal Operating Cell Temperature, Irradiance of 800 W/m<sup>2</sup>, Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s


#### TEMPERATURE COEFFICIENT AND PARAMETERS

Nominal Operating Cell Temperature (NOCT)	45°C ± 2°C
Temperature Coefficient of Pmax	-0.385%/°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.055%/°C
Operating Temperature	45°C~+85°C
Maximum System Voltage	1500VDC
Limiting Reverse Current	15A
Maximum Series Fuse Rating	15A
Power Tolerance (W)	0/+3%
Application Class	Class A
Wind and Snow Front Load	Up to 5,400 Pa
Wind Back Load	2,400 Pa



#### PACKAGING CONFIGURATION

	40ft	20ft
Number of Modules per Container	720	300
Number of Modules per Pallet	30	30
Number of Pallets per Container	24	10
Box Dimension (L x W x H) in mm	1956 x 1100 x 1250	1956 x 1100 x 1250
Box Gross Weight (Kg)	680	680

#### DIMENSION OF PV MODULE UNIT

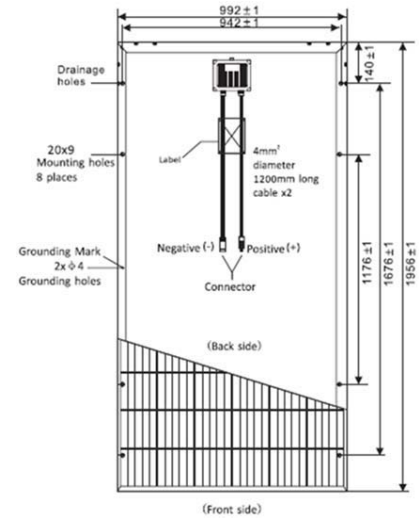

#### I-V CURVE

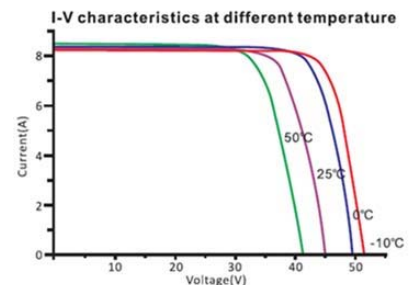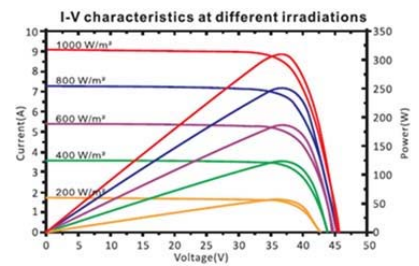

#### AUTHORIZED PARTNER OF NST

